

# Review 2

## Physics 106

Fall 2006

### Review 2 for 2<sup>nd</sup> CQZ

### Rolling and Kinetic Energy Conservation of Angular Momentum

<http://web.njit.edu/~sirenko/>

10/xx/2006

Andrei Sirenko, NJIT

1

#### Physics 106:

$$360 \text{ degrees} = 2\pi \text{ radians} = 1 \text{ revolution. } s = r\theta \quad v_t = r\omega \quad a_t = r\alpha \quad a_c = a_r = v_t^2/r = \omega^2 r \quad a_{\text{tot}}^2 = a_r^2 + a_t^2$$

for rotation with constant angular acceleration:

$$\omega = \omega_0 + \alpha t \quad \theta - \theta_0 = \omega_0 t + \frac{1}{2}\alpha t^2 \quad \omega^2 - \omega_0^2 = 2\alpha(\theta - \theta_0) \quad \theta - \theta_0 = \frac{1}{2}(\omega + \omega_0)t \quad KE_{\text{rot}} = \frac{1}{2}I\omega^2$$

$$I = \sum m_i r_i^2 \quad I_{\text{point}} = mr^2 \quad I_{\text{hoop}} = MR^2 \quad I_{\text{disk}} = \frac{1}{2}MR^2 \quad I_{\text{sphere}} = \frac{2}{5}MR^2 \quad I_{\text{shell}} = \frac{2}{3}MR^2 \quad I_{\text{rod (center)}} = \frac{1}{12}ML^2$$

$$\Sigma \mathbf{F} = m\mathbf{a} \quad \Sigma \tau = I\alpha \quad \tau = \mathbf{r} \times \mathbf{F} \quad I_p = I_{\text{cm}} + Mh^2$$

$$\tau = \text{force} \times \text{moment arm} = Fr \sin(\phi) \quad \tau_{\text{net}} = \Sigma \tau = I\alpha \quad \mathbf{F}_{\text{net}} = \Sigma \mathbf{F} = m\mathbf{a} \quad \tau = \mathbf{r} \times \mathbf{F} \quad I_p = I_{\text{cm}} + Mh^2$$

$$W_{\text{tot}} = \Delta K = K_f - K_i \quad W = \tau_{\text{net}} \Delta \theta \quad K = K_{\text{rot}} + K_{\text{cm}} \quad E_{\text{mech}} = K + U \quad P_{\text{average}} = \Delta W / \Delta t$$

$$P_{\text{instantaneous}} = \tau \cdot \omega \quad (\tau \text{ constant}) \quad \Delta E_{\text{mech}} = 0 \quad (\text{isolated system}) \quad v_{\text{cm}} = \omega r \quad (\text{rolling, no slipping})$$

$$\ell = \mathbf{r} \times \mathbf{p} \quad \mathbf{p} = m\mathbf{v} \quad L = \Sigma \ell \quad \tau_{\text{net}} = dL/dt \quad L = I\omega \quad \ell_{\text{point mass}} = mrv \sin(\phi)$$

$$\text{For isolated systems: } \tau_{\text{net}} = 0 \quad L \text{ is constant} \quad \Delta L = 0 \quad L_0 = \Sigma \ell_0 = L_f = \Sigma \ell_f$$

$$\mathbf{a} \times \mathbf{b} = -\mathbf{b} \times \mathbf{a} \quad \mathbf{a} \times \mathbf{a} = 0 \quad |\mathbf{a} \times \mathbf{b}| = a \cdot b \cdot \sin(\phi) \quad \mathbf{c} = \mathbf{a} \times \mathbf{b} \text{ is perpendicular to plane of } \mathbf{a} \text{ and } \mathbf{b}$$

$$c_x = a_y b_z - a_z b_y \quad c_y = -a_x b_z + a_z b_x \quad c_z = a_x b_y - a_y b_x$$

$$\mathbf{i} \times \mathbf{i} = \mathbf{j} \times \mathbf{j} = \mathbf{k} \times \mathbf{k} = 0 \quad \mathbf{i} \times \mathbf{j} = \mathbf{k} \quad \mathbf{j} \times \mathbf{k} = \mathbf{i} \quad \mathbf{k} \times \mathbf{i} = \mathbf{j} \quad \text{etc.}$$

10/xx/2006

Andrei Sirenko, NJIT

2

## Vector Product:

$$\mathbf{a} \times \mathbf{b} = -\mathbf{b} \times \mathbf{a} \quad \mathbf{a} \times \mathbf{a} = 0 \quad |\mathbf{a} \times \mathbf{b}| = a \cdot b \cdot \sin(\phi)$$

$$\mathbf{c} = \mathbf{a} \times \mathbf{b} \text{ is perpendicular to plane of } \mathbf{a} \text{ and } \mathbf{b}$$


$$c_x = a_y b_z - a_z b_y \quad c_y = -a_x b_z + a_z b_x \quad c_z = a_x b_y - a_y b_x$$

$$\mathbf{i} \times \mathbf{i} = \mathbf{j} \times \mathbf{j} = \mathbf{k} \times \mathbf{k} = 0 \quad \mathbf{i} \times \mathbf{j} = \mathbf{k} \quad \mathbf{j} \times \mathbf{k} = \mathbf{i} \quad \mathbf{k} \times \mathbf{i} = \mathbf{j}$$

#### Rotational Analogy to Linear Motion

	Translation	Rotation
position	$x$	$\theta$
velocity	$v = dx/dt$	$\omega = d\theta/dt$
acceleration	$a = dv/dt$	$\alpha = d\omega/dt$

mass	$m$	$I = \Sigma m_i r_i^2$
Kinetic Energy	$K = \frac{1}{2}mv^2$	$K = \frac{1}{2}I\omega^2$
Force	$F = ma$	$\tau_{\text{net}} = I\alpha$



$$\vec{\tau} = [\vec{r} \times \vec{F}]$$

$$\tau = r \cdot F \cdot \sin \phi$$

Angular Displacement  
Angular Velocity  
Angular Acceleration

$$\theta, \quad \omega, \quad \alpha$$



Linear Equation	Missing Variable	Angular Equation
$v = v_0 + at$	$x - x_0$	$\omega = \omega_0 + \alpha t$
$x - x_0 = v_0 t + \frac{1}{2}at^2$	$v$	$\theta - \theta_0 = \omega_0 t + \frac{1}{2}\alpha t^2$
$v^2 = v_0^2 + 2a(x - x_0)$	$t$	$\omega^2 = \omega_0^2 + 2\alpha(\theta - \theta_0)$
$x - x_0 = \frac{1}{2}(v_0 + v)t$	$a$	$\theta - \theta_0 = \frac{1}{2}(\omega_0 + \omega)t$
$x - x_0 = vt - \frac{1}{2}at^2$	$v_0$	$\theta - \theta_0 = \omega t - \frac{1}{2}\alpha t^2$

10/xx/2006

Andrei Sirenko, NJIT

3










10/xx/2006

Andrei Sirenko, NJIT

4


TABLE 11-2

## Rotational Inertia


 <p>Hoop about central axis</p> $I = MR^2$ <p>(a)</p>	 <p>Annular cylinder (or ring) about central axis</p> $I = \frac{1}{2} M (R_1^2 + R_2^2)$ <p>(b)</p>	 <p>Thin spherical shell about any diameter</p> $I = \frac{2}{3} MR^2$ <p>(g)</p>
 <p>Solid cylinder (or disk) about central axis</p> $I = \frac{1}{2} MR^2$ <p>(c)</p>	 <p>Solid cylinder (or disk) about central diameter</p> $I = \frac{1}{4} MR^2 + \frac{1}{12} ML^2$ <p>(d)</p>	 <p>Slab about perpendicular axis through center</p> $I = \frac{1}{12} M (a^2 + b^2)$ <p>(i)</p>
 <p>Thin rod about axis through center perpendicular to length</p> $I = \frac{1}{12} ML^2$ <p>(e)</p>	 <p>Solid sphere about any diameter</p> $I = \frac{2}{5} MR^2$ <p>(f)</p>	 <p>Hoop about any diameter</p> $I = \frac{1}{2} MR^2$ <p>(h)</p>

## Smooth rolling motion

## Rotation and Translation

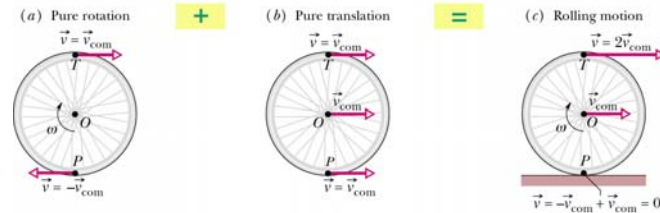

## Reference frame



10/xx/2006

## Kinetic Energy of Rolling

$$K = \frac{1}{2} I_C \omega^2 + \frac{1}{2} M v_C^2$$

$$v_{com} = \omega R$$

$$K = \frac{1}{2} \left( \frac{I_C}{R^2} + M \right) v_C^2$$

Andrei Sirenko, NJIT

6

## Example 1

## Kinetic Energy of Rolling

$$K = \frac{1}{2} \left( \frac{I_C}{R^2} + M \right) v_C^2$$

+ Energy conservation !!!

Kinetic Energy  $\leftrightarrow$  Potential Energy

$$\Delta U + \Delta K = 0 \rightarrow U_{initial} = K_{final} \rightarrow Mgh = \frac{1}{2} \left( \frac{I_C}{R^2} + M \right) v_{com}^2$$

Disk:                      Hoop:                      Sphere:

$$I_{com} = \frac{1}{2} MR^2 \quad I_{com} = MR^2 \quad I_{com} = \frac{2}{5} MR^2$$

$$\text{For disk: } Mgh = \frac{1}{2} \left( \frac{1}{2} M + M \right) v_{com}^2; \quad v_{com} = (4/3 gh)^{1/2}$$

10/xx/2006

Andrei Sirenko, NJIT

7

## Angular Momentum

$$\vec{l} = \vec{r} \times \vec{p} = m(\vec{r} \times \vec{v}) \quad [\text{kg m}^2/\text{s}]$$


System of particles

$$\vec{L} = \vec{l}_1 + \vec{l}_2 + \dots + \vec{l}_n = \sum_{i=1}^n \vec{l}_i \quad \underline{L = m \cdot r \cdot v \cdot \sin \phi}$$

For rotating body:



$$\underline{L = I\omega}$$

## Torque:



$$\vec{\tau} = [\vec{r} \times \vec{F}]$$

$$\underline{\tau = r \cdot F \cdot \sin \phi}$$



8

## Linear Momentum

$$\vec{p} = m\vec{v}$$

$$[\text{kg m/s}]$$

## Angular Momentum

$$\vec{L} = \vec{r} \times \vec{p} \quad [\text{kg m}^2/\text{s}]$$

$$\vec{L} = \vec{r} \times \vec{p} = m\vec{r} \times \vec{v}$$

$$L = m \cdot r \cdot v \cdot \sin\phi$$

Both are vectors

$$\vec{F} = \frac{d\vec{p}}{dt} = m\vec{a}$$

$$\frac{d}{dt}(\vec{L}) = \vec{\tau} = I\vec{\alpha}$$

For rotating body:

$$L = I\omega$$

$$m \leftrightarrow I$$

$$v \leftrightarrow \omega$$

**FOR ISOLATED SYSTEM: L IS CONSERVED**


10/xx/2006

Andrei Sirenko, NJIT

9

## Angular Momentum Conservation:

"If the external torque is equal to zero, L is conserved"

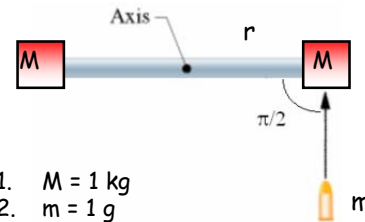

1.  $M = 1 \text{ kg}$
2.  $m = 1 \text{ g}$
3.  $r = 1 \text{ m}$
4.  $\omega_i = 0$        $\omega_f = 1 \text{ rad/s}$
5.  $v_{\text{bullet}} = ?$        $K_f/K_i = ?$

1.  $L_i = L_{\text{bullet}} = m \cdot v \cdot r \cdot \sin(\pi/2) = ???$
2.  $L_f = I \cdot \omega = (Mr^2 + Mr^2 + mr^2) \omega_f = 2 \text{ kg} \cdot \text{m}^2/\text{s}$
3.  $L_i = L_f$  (angular momentum conserv.)
4.  $v_{\text{bullet}} = \omega_f \cdot (2Mr^2 + mr^2) / mr = 2000 \text{ m/s}$

1. Define a rotational axis and the origin
2. Calculate L before interaction or any changes in I
3. Compare with L after the interaction or any change in I

5.  $K_i = \frac{1}{2} m v_{\text{bullet}}^2 = 2000 \text{ J}$
6.  $K_f = \frac{1}{2} I \omega^2 = 1 \text{ J}$
7.  $K_f/K_i = 1/2000$


10/xx/2006

Andrei Sirenko, NJIT

10

## A Example:

A horizontal disc of rotational inertia  $I = 1 \text{ kg} \cdot \text{m}^2$  and radius **100 cm** is rotating about a vertical axis through its center with an angular speed of **1 rad/s**. A wad of wet putty of mass **100 grams** drops vertically onto the disc from above and sticks to the edge of the disk. What is the angular speed of the disk right after the putty sticks to it?



10/xx/2006

Andrei Sirenko, NJIT

11

## A Example:

A horizontal disc of rotational inertia  $I = 1 \text{ kg} \cdot \text{m}^2$  and radius **100 cm** is rotating about a vertical axis through its center with an angular speed of **1 rad/s**. A wad of wet putty of mass **100 grams** drops vertically onto the disc from above and sticks to the edge of the disk. What is the angular speed of the disk right after the putty sticks to it?



1.  $L_i = I_i \cdot \omega_i = 1 \text{ kg} \cdot \text{m}^2 \cdot 1 \text{ rad/s} = 1 \text{ kg} \cdot \text{m}^2/\text{s}$
2.  $I_f = (I_i + mr^2) = (1 \text{ kg} \cdot \text{m}^2 + 0.1 \text{ kg} \cdot \text{m}^2)$
3.  $L_i = L_f$  (angular momentum conserv.)
4.  $\omega_f = \omega_i I_i / I_f = 1 \text{ rad/s} \cdot (1/1.1) = 0.91 \text{ rad/s}$

1. Define a rotational axis and the origin
2. Calculate L before interaction or any change in I
3. Compare with L after the interaction or any change in I

10/xx/2006


Andrei Sirenko, NJIT

12

## More Examples:

2. One wheel of rotational inertia  $I_1 = 2 \text{ kgm}^2$  is rotating freely at 20 rad/sec in counterclockwise direction on a shaft whose rotational inertia is negligible. A second wheel of rotational inertia  $I_2 = 5 \text{ kgm}^2$ , rotating freely at 15 rad/sec in the opposite direction, is suddenly coupled along the same shaft to the first wheel. Afterwards, the coupled wheel system rotates at

- 1.00 rad/s, counterclockwise
- 2.25 rad/s, clockwise
- 4.50 rad/s, clockwise
- 5.00 rad/s, counterclockwise
- 5.00 rad/s, clockwise



10/xx/2006

Andrei Sirenko, NJIT

13

## More Examples:

3. A student, with arms at her sides, is spinning on a frictionless turntable. When the student extends her arms,
- her angular velocity increases.
  - her angular velocity remains the same.
  - her rotational inertia decreases.
  - her rotational kinetic energy increases.
  - her angular momentum remains the same.



4. When a man on a frictionless rotating turntable extends his arms out horizontally, his angular momentum



- must increase
- must remain the same
- must increase
- may increase or decrease depending on his initial angular velocity
- none of the above

5. A large bug walks from the center of a rotating turntable to its edge and stops. The angular velocity of the turntable



- stays the same.
- increases.
- decreases.
- can not be determined unless the mass of the bug and radius and rotational inertia of the turntable are given.
- can not be determined even if the mass of the bug and radius and rotational inertia of the turntable are given.

$$\vec{L} = I\omega$$

$$\vec{L} = \text{const.} \Rightarrow \vec{L}_i = \vec{L}_f$$



Rotation axis  
(a)



(b)

14

6. A wheel of moment of inertia of  $5 \text{ kg m}^2$  starts from rest and accelerates under a constant torque of  $3.0 \text{ N m}$  for 8.0 seconds. What is the wheel's rotational kinetic energy at the end of 8 seconds?

- 57.6 J
- 64.0 J
- 78.8 J
- 122 J
- 154 J

$$K = \frac{1}{2} I_c \omega^2$$

7. A 32-kg wheel, essentially a thin hoop, with moment of inertia  $I = 3 \text{ kg m}^2$  is rotating at 280 rev/min. It must be brought to stop in 15 seconds. The required work to stop it is:

- 1000 J
- 1100 J
- 1200 J
- 1300 J

Work, constant torque

$$W = \tau(\theta_f - \theta_i)$$

8. A 10-kg disk with radius 30 cm must reach a final velocity of 300 rev/min in 10 sec. What is the required average power?

- 10 W
- 22 W
- 45 W
- 60 W
- 72 W

Power, rotation about fixed axis

$$P = \frac{dW}{dt} = \tau\omega$$

T

15