




DR. DAVID WASHINGTON
ASSOCIATE PROFESSOR
DEPARTMENT OF ENGINEERING TECHNOLOGY
CONCRETE APPLICATIONS II
CMT 305

NJIT
New Jersey's Science & Technology University
CONCRETE INDUSTRY MANAGEMENT TECHNOLOG

TABLE AND CHARTS

PLEASE STAPLE YOUR SOLUTIONS ON BACK OF YOUR
EXAM!! (SHOW ALL WORK ON GRAPHS)

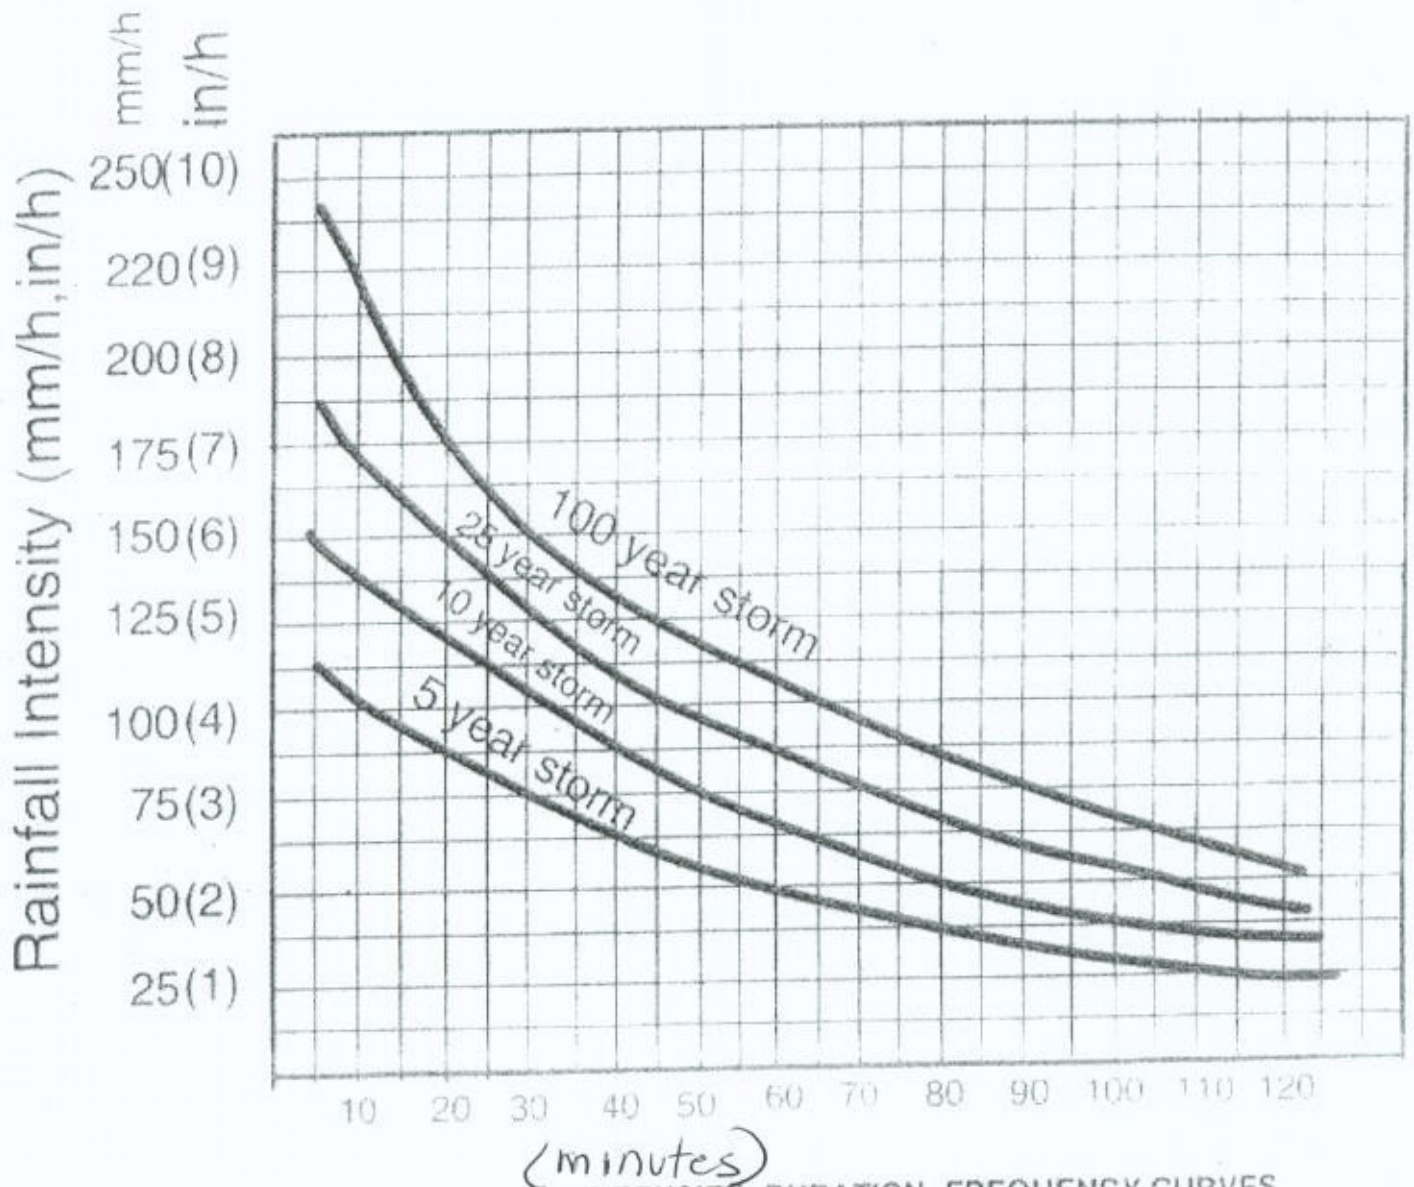

TYPICAL RAINFALL INTENSITY- DURATION- FREQUENCY CURVES

Curves like these are prepared from the rainfall statistics by the US National Climatic Data Center

Table 3

**FULL FLOW COEFFICIENT VALUES
CIRCULAR CONCRETE PIPE**

D Pipe Diameter (inches)	A Area (Square Feet)	R Hydraulic Radius (Feet)	Value of $C_1 = \frac{1.486}{n} \times A \times R^{2/3}$			
			n=0.010	n=0.011	n=0.012	n=0.013
8	0.349	0.167	15.8	14.3	13.1	12.1
10	0.545	0.208	28.4	25.8	23.6	21.8
12	0.785	0.250	46.4	42.1	38.6	35.7
15	1.227	0.312	84.1	76.5	70.1	64.7
18	1.767	0.375	137	124	114	105
21	2.405	0.437	206	187	172	158
24	3.142	0.500	294	267	245	226
27	3.976	0.562	402	366	335	310
30	4.909	0.625	533	485	444	410
33	5.940	0.688	686	624	574	530
36	7.069	0.750	867	788	722	666
42	9.621	0.875	1308	1189	1090	1006
48	12.566	1.000	1867	1698	1556	1436
54	15.904	1.125	2557	2325	2131	1967
60	19.635	1.250	3385	3077	2821	2604
66	23.758	1.375	4364	3967	3636	3357
72	28.274	1.500	5504	5004	4587	4234
78	33.183	1.625	6815	6195	5679	5242
84	38.485	1.750	8304	7549	6920	6388
90	44.170	1.875	9985	9078	8321	7681
96	50.266	2.000	11850	10780	9878	9119
102	56.745	2.125	13940	12670	11620	10720
108	63.617	2.250	16230	14760	13530	12490
114	70.882	2.375	18750	17040	15620	14420
120	78.540	2.500	21500	19540	17920	16540
126	86.590	2.625	24480	22260	20400	18830
132	95.033	2.750	27720	25200	23100	21330
138	103.870	2.875	31210	28370	26010	24010
144	113.100	3.000	34960	31780	29130	26890

Table 8

RUNOFF COEFFICIENTS FOR VARIOUS AREAS

DESCRIPTION OF AREA	RUNOFF COEFFICIENTS
Business:	
Downtown areas	0.70 to 0.95
Neighborhood areas	0.50 to 0.70
Residential:	
Single-family areas	0.30 to 0.50
Multi units, detached	0.40 to 0.60
Multi units, attached	0.60 to 0.75
Residential (suburban)	0.25 to 0.40
Apartment dwelling areas	0.50 to 0.70
Industrial:	
Light areas	0.50 to 0.80
Heavy areas	0.60 to 0.90
Parks, cemeteries	0.10 to 0.25
Playgrounds	0.20 to 0.35
Railroad yard areas	0.20 to 0.40
Unimproved areas	0.10 to 0.30

Table 9

**RAINFALL INTENSITY
CONVERSION FACTORS**

Duration in Minutes	Factor	Duration in Minutes	Factor
5	2.22	40	0.8
10	1.71	50	0.7
15	1.44	60	0.6
20	1.25	90	0.5
30	1.00	120	0.4

Table 10

RECURRENCE INTERVAL FACTORS

Recurrence Interval in Years	Factor
2	1.0
5	1.3
10	1.6
25	1.9
50	2.2

Figure 4

**FLOW FOR CIRCULAR PIPE FLOWING FULL
BASED ON MANNING'S EQUATION $n=0.012$**

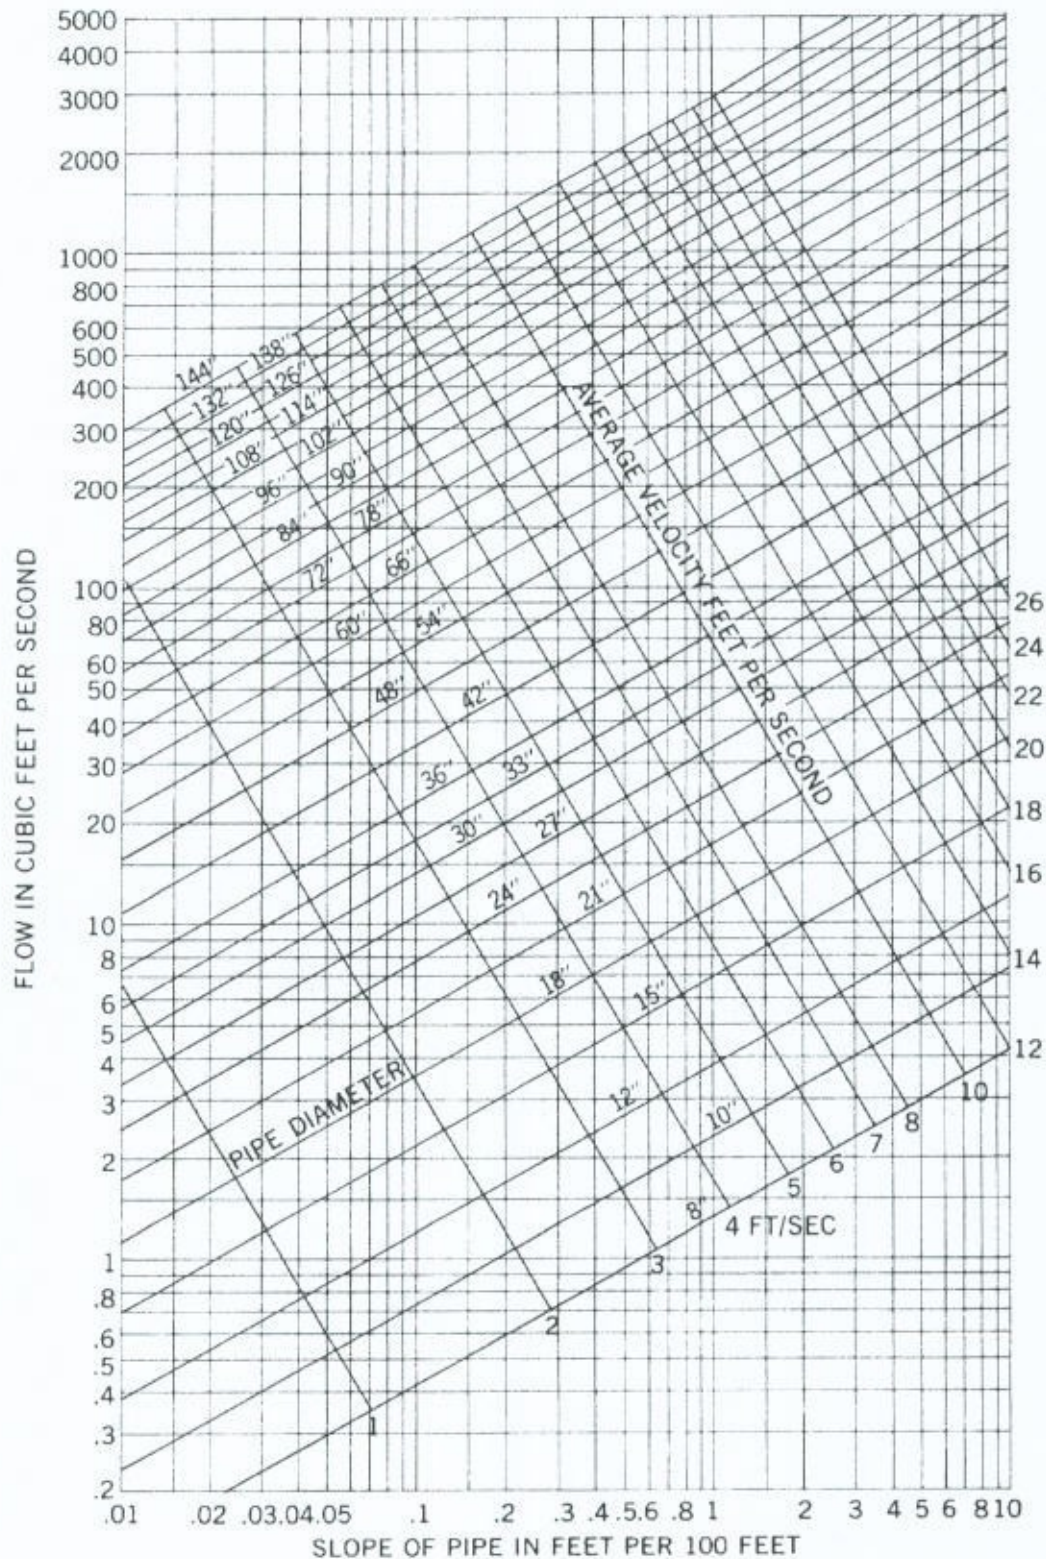


Figure 20

